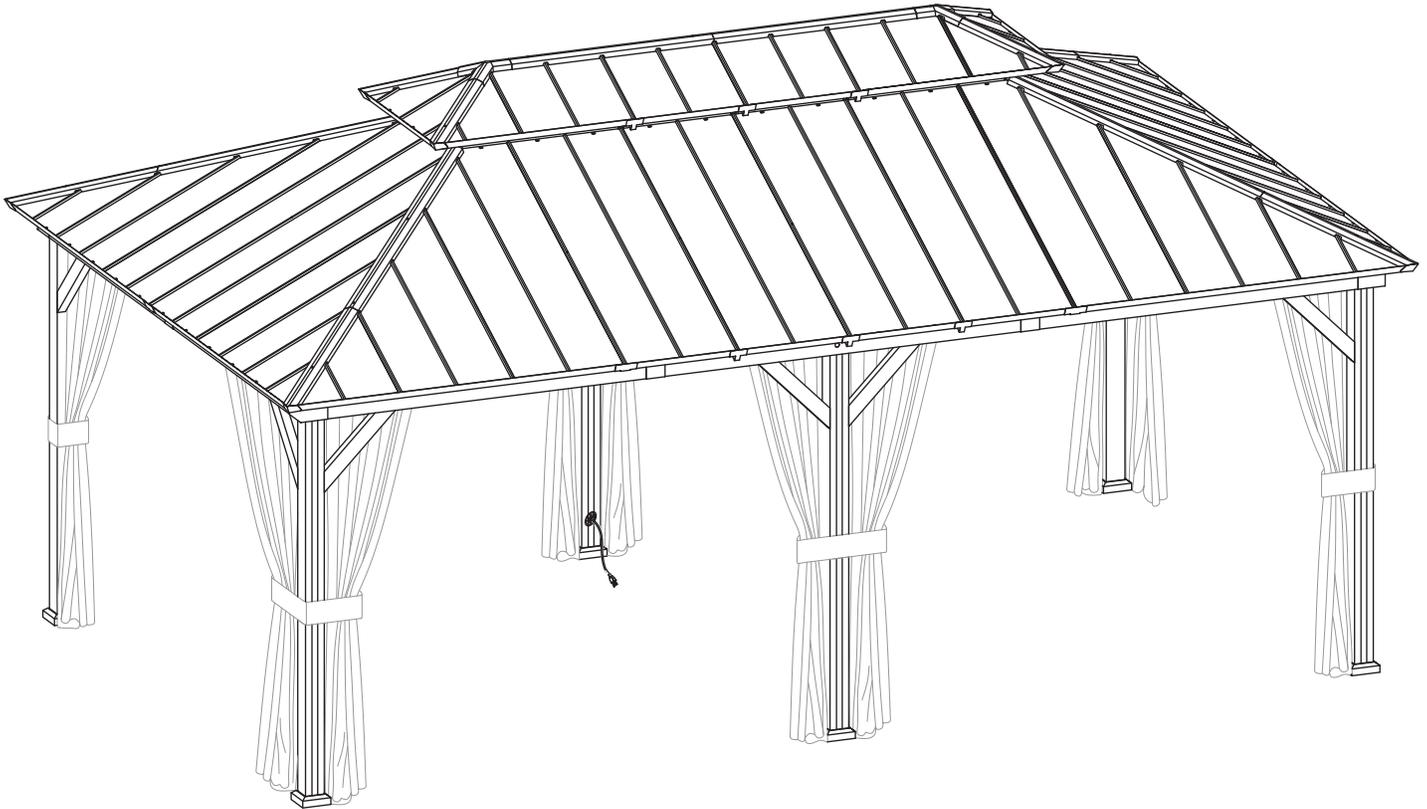


MODEL: IG10600042-1220



OWNER'S MANUAL

12' X 20' Four Seasons Hard Top Gazebo with LED Lighting

TABLE OF CONTENTS

ASSEMBLY GUIDE.....02
USING YOUR PRODUCT.....05

April 12, 2024

Questions?

E-mail: support@modernshade.org

Toll Free: 1-888-666-3070

Mon-Fri: 9:00 —17:00 PST.

IMPORTANT:

This instruction manual contains important information necessary for the proper assembly and safe use of the product.

Read and follow all warnings and instructions before assembling and using the product.

Follow all warnings and instructions when using the product.

Keep this manual for future reference.

Installer/Assembler: leave these instructions with the consumer.

SAFETY ALERT KEY

⚠ DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

⚠ WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

⚠ CAUTION

































Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.
























NOTICE








Indicates information considered important, but not hazard-related (e.g.messages related to property damage).

ASSEMBLY GUIDE















PARTS LIST

A1 Post 1 (2 pieces) 	A2 Post 2 (2 pieces) 	A3 Post 3 (1 piece) 	A4 Post 4 (1 piece) 	B Foot Cover (6 pieces) 	C Foot Base (6 pieces) 
P0008008526	P0008008527	P0008008528	P0008008529	P0008008530	P0008008531
D1 Cross Beam 1 (2 pieces) 	D2 Cross Beam 2 (2 pieces) 	D3 Cross Beam 3 (2 pieces) 	D4 Cross Beam 4 (2 pieces) 	D5 Cross Beam 5 (2 pieces) 	E1 Roof Rib 1 (4 pieces) 
P0008008532	P0008008533	P0008008534	P0008008535	P0008008536	P0008008537
E2 Roof Rib 2 (4 pieces) 	E3 Roof Rib 3 (4 pieces) 	F1 Middle Cross Beam 1 (6 pieces) 	F2 Middle Cross Beam 2 (6 pieces) 	G1 Support Bracket 1 (6 pieces) 	G2 Support Bracket 2 (6 pieces) 
P0008008538	P0008008539	P0008008540	P0008008541	P0008008542	P0008008543
H1 Mosquito Net Rod 1 (4 pieces) 	H2 Mosquito Net Rod 2 (8 pieces) 	J1 Roof Support 1 (8 pieces) 	J2 Roof Support 2 (8 pieces) 	J3 Roof Support 3 (8 pieces) 	J4 Roof Support 4 (8 pieces) 
P0008008544	P0008008545	P0008008546	P0008008547	P0008008548	P0008008549
K1 Roof Lower Border 1 (4 pieces) 	K2 Roof Lower Border 2 (4 pieces) 	K3 Roof Lower Border 3 (8 pieces) 	K4 Roof Lower Border 4 (2 pieces) 	K5 Roof Lower Border 5 (2 pieces) 	L1 Roof Top Border 1 (2 pieces) 
P0008008550	P0008008551	P0008008552	P0008008553	P0008008554	P0008008555
L2 Roof Top Border 2 (2 pieces) 	L3 Roof Top Border 3 (2 pieces) 	M1 Roof Upper Border 1 (2 pieces) 	M2 Roof Upper Border 2 (2 pieces) 	M3 Roof Upper Border 3 (2 pieces) 	M4 Roof Upper Border 4 (4 pieces) 
P0008008556	P0008008557	P0008008558	P0008008559	P0008008560	P0008008561

<p>N1 Roof Cover 1 (1 piece)</p> 	<p>N2 Roof Cover 2 (1 piece)</p> 	<p>N3 Roof Cover 3 (2 pieces)</p> 	<p>N4 Roof Cover 4 (4 pieces)</p> 	<p>N5 Roof Cover 5 (4 pieces)</p> 	<p>N6 Roof Cover 6 (4 pieces)</p> 
P0008008562	P0008008563	P0008008564	P0008008565	P0008008566	P0008008567
<p>P1 Middle Cross Beam Support 1 (3 pieces)</p> 	<p>P2 Middle Cross Beam Support 2 (2 pieces)</p> 	<p>Q1 Connector 1 (4 pieces)</p> 	<p>Q2 Connector 2 (6 pieces)</p> 	<p>Q3 Connector 3 (6 pieces)</p> 	<p>Q4 Connector 4 (6 pieces)</p> 
P0008008568	P0008008569	P0008008570	P0008008571	P0008008572	P0008008573
<p>Q5 Connector 5 (12 pieces)</p> 	<p>Q6 Connector 6 (18 pieces)</p> 	<p>Q7 Connector 7 (24 pieces)</p> 	<p>Q8 Connector 8 (8 pieces)</p> 	<p>Q9 Connector 9 (6 pieces)</p> 	<p>Q10 Connector 10 (12 pieces)</p> 
P0008008574	P0008008575	P0008008576	P0008008577	P0008008578	P0008008579
<p>Q11 Connector 11 (6 pieces)</p> 	<p>Q12 Connector 12 (4 pieces)</p> 	<p>Q13 Connector 13 (1 piece)</p> 	<p>Q14 Connector 14 (2 pieces)</p> 	<p>R1 Roof Plate 1 (8 pieces)</p> 	<p>R2 Roof Plate 2 (4 pieces)</p> 
P0008008580	P0008008581	P0008008582	P0008008583	P0008008584	P0008008585
<p>R3 Roof Plate 3 (4 pieces)</p> 	<p>R4 Roof Plate 4 (4 pieces)</p> 	<p>R5 Roof Plate 5 (4 pieces)</p> 	<p>R6 Roof Plate 6 (4 pieces)</p> 	<p>R7 Roof Plate 7 (4 pieces)</p> 	<p>S1 Roof Top Plate 1 (4 pieces)</p> 
P0008008586	P0008008587	P0008008588	P0008008589	P0008008590	P0008008591
<p>S2 Roof Top Plate 2 (4 pieces)</p> 	<p>S3 Roof Top Plate 3 (8 pieces)</p> 	<p>T Hook (3 pieces)</p> 	<p>U Electrical Power Cover (1 piece)</p> 	<p>V Privacy Curtain (1 piece)</p> 	<p>W Lights Cover (Pre-Installed) (6 pieces)</p> 
P0008008592	P0008008593	P0008008594	P0008008595	P0008008596	P0008008597

X1 Wire 1 (Pre-Installed) (1 piece) 	X2 Wire 2 (2 pieces) 	X3 Wire 3 (1 piece) 	X4 Wire 4 (1 piece) 	X5 Wire 5 (1 piece) 	Y Mosquito Netting (1 piece) 
P0008008598	P0008008599	P0008008600	P0008008601	P0008008602	P0008008603
Z Spare Light Pack (1 piece) 	ZS Spare Wire Pack (X1,X2,X3,X4,X5) (1 piece) 				
P0008008646	P0008008647				

HARDWARE

AA Bolt M6*15 (92+6 pieces) 	BB Bolt M6*20 (446+25 pieces) 	CC Bolt M6*45 (22+2 pieces) 	DD Bolt M6*60 (27+2 pieces) 	EE Bolt M3*9 (4+1 pieces) 	FF M6 Flat washer (590+30 pieces) 
H0008008001	H0008008036	H0008008016	H0008008091	H0008008092	H0008008057
GG M6 Sealant Washer (104+8 pieces) 	HH Plastic Clip (24+3 pieces) 	JJ Wire Mountng (40+10 pieces) 	KK Concrete Anchor M6*60 (12 pieces) 	LL Double Open End Wrench M5/M6 (2 pieces) 	MM M6 Allen Key with Screw Driver (1 piece) 
H0008008060	H0008008093	H0008008094	H0008008095	H0008008121	H0008008132
NN M6 Allen Key (1 piece) 	PP Screw Nut M6 (3 pieces) 	QQ Rings (128+8 pieces) 	RR plastic Clip 2 (4 pieces) 	SS Bolt M5*30 (12+1 pieces) 	TT M5 Flat washer (12+1 pieces) 
H0008008133	H0008008112	H0008008113	H0008008114	H0008008115	H0008008056
UU M5 Sealant Washer (12+1 pieces) 					
H0008008059					

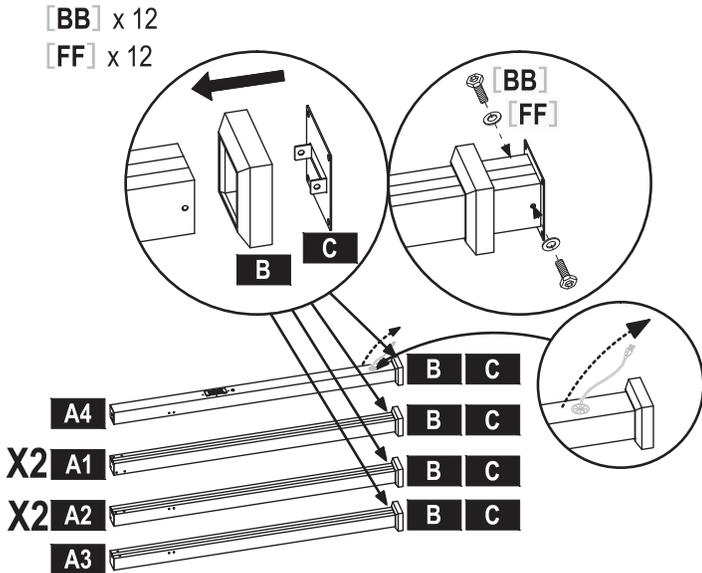
ASSEMBLY INSTRUCTIONS

•Please carefully unpack each of the components and hardware. check the components against the parts list and make sure there are no missing parts. lay pieces on cardboard or a soft mat to help protect the pieces from scratches.


⚠ CAUTION

Watch for sharp edges when handling the pieces, wear gloves to avoid injury.

STEP 01 Pull the electric cord out through the plug on post **A4**. Slide foot cover **B** and foot base **C** onto posts **A1**, **A2**, **A3** and **A4**. Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach foot base **C** to post **A1**, **A2**, **A3** and **A4**. Repeat with the other post **A1** and **A2**.




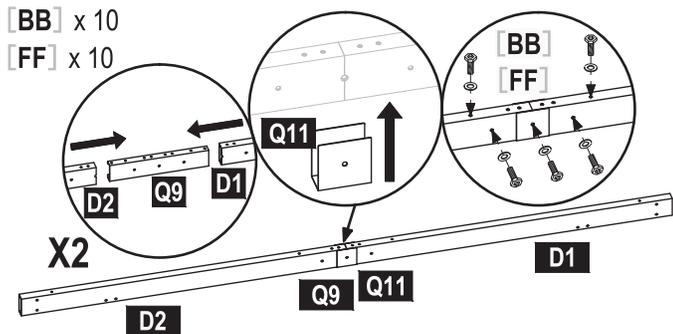STEP 03 Slide cross beam **D1** and **D2** onto connector 9 **Q9**. Slide one (1) connector 11 **Q11** under cross beam **D1** and **D2**. Use six (6) **[BB]** bolts and six (6) **[FF]** flat washers to attach one (1) connector **Q11** to cross beam assembly **D1** **D2**. Repeat with the other cross beam **D1** and **D2**.




- For ease of assembly, it is recommended to have 3 or more people and allow enough time to completely finish the assembly. assembly can take 6-8 hours. a step-ladder is required for assembly (not included).
- Follow step by step instructions, and follow all safety warnings provided with your tools.
- DO NOT tighten screws until all the screws and washers are properly installed. tighten screws securely, do not over tighten.
- Gazebo should not be used in inclement weather and high winds.

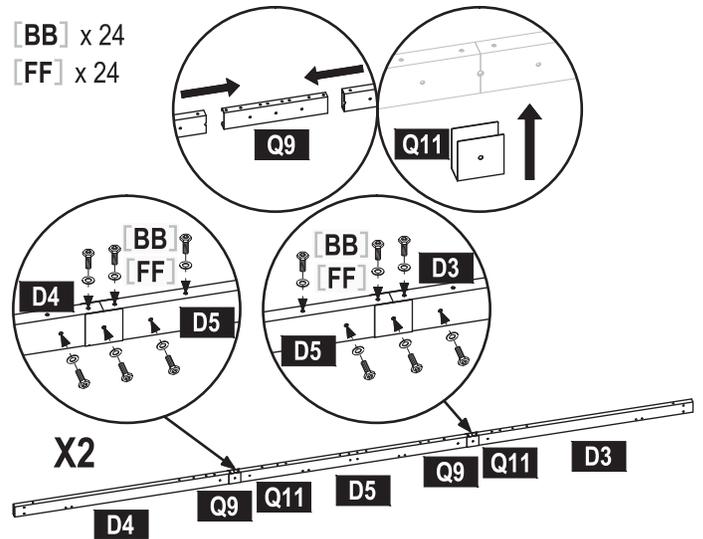STEP 02 Slide cross beam **D3**, **D4** and **D5** onto connector 9 **Q9**. Repeat with the other cross beam **D3**, **D4** and **D5**. Slide one (1) connector 11 **Q11** under cross beam assembly **D3** **D4** **D5**. Use six (6) **[BB]** bolts and six (6) **[FF]** flat washers to attach connector **Q11** to cross beam assembly **D3** **D4** **D5**. Repeat with the other three (3) connector **Q11**.




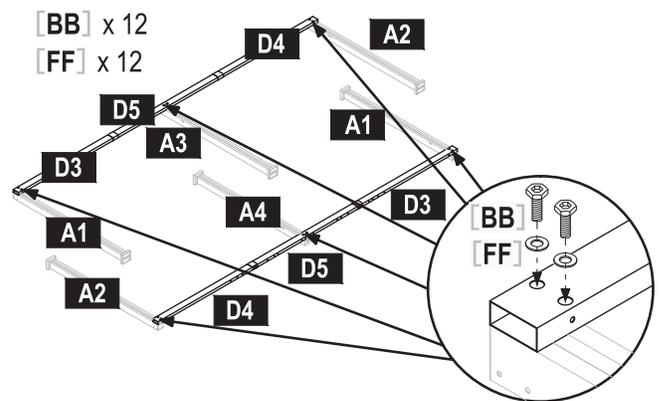STEP 04 Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach post **A1** to cross beam **D3** **D4** **D5**. Repeat with the posts **A1**, **A2**, **A3** and **A4**.




STEP 05 Use four (4) [BB] bolts and four (4) [FF] flat washers to attach cross beam assembly [D1] [D2] to post [A1] and [A2]. Repeat with the other cross beam assembly [D1] [D2]. Attach two (2) [RR] plastic clips to cross beam [D5]. Repeat with the other cross beam [D5].

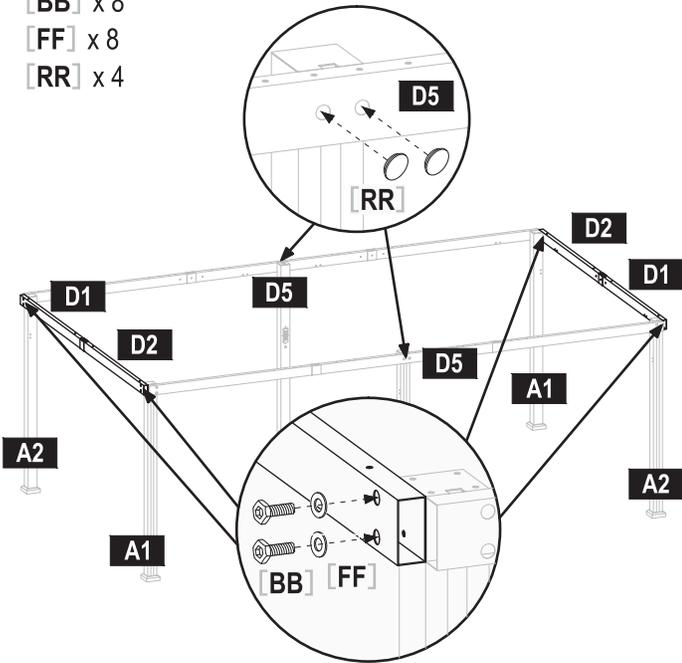- [BB] x 8
- [FF] x 8
- [RR] x 4



STEP 06 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 12 [Q12] to cross beam assembly [D1] [D2] and [D3] [D4] [D5]. Repeat with the other three (3) connector [Q12]. Use four (4) [BB] bolts and four (4) [FF] flat washers to attach one (1) connector 1 [Q1] to post [A1]. Repeat with the other three (3) connector [Q1] with post [A1] and [A2].

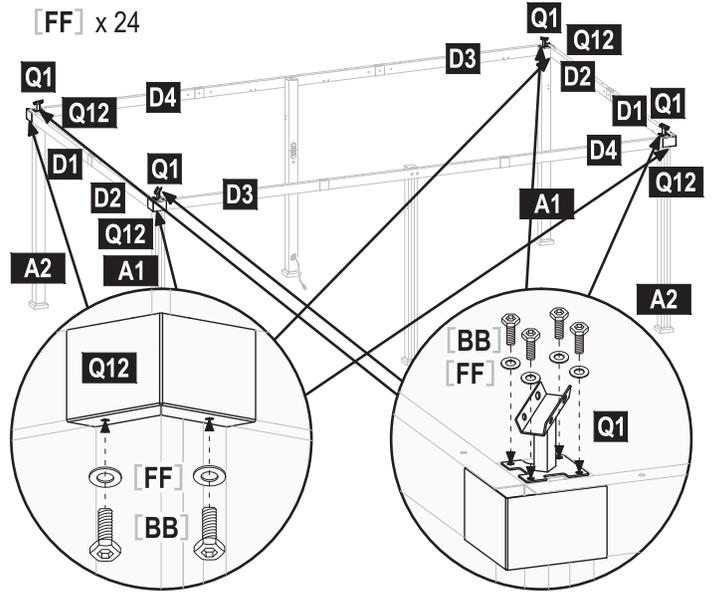- [BB] x 24
- [FF] x 24



STEP 07 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 10 [Q10] to post [A1]. Repeat with the other three (3) connector [Q10] with post [A1], [A2], [A3] and [A4].

Use one (1) [BB] bolt and one (1) [FF] flat washer to attach one (1) support bracket 1 [G1] to post [A1]. Use two (2) [DD] bolts and two (2) [FF] flat washers to attach one (1) support bracket 1 [G1] to cross beam assembly [D1] [D2]. Repeat with the other five (5) support bracket [G1] with post [A1], [A2], [A3] and [A4].

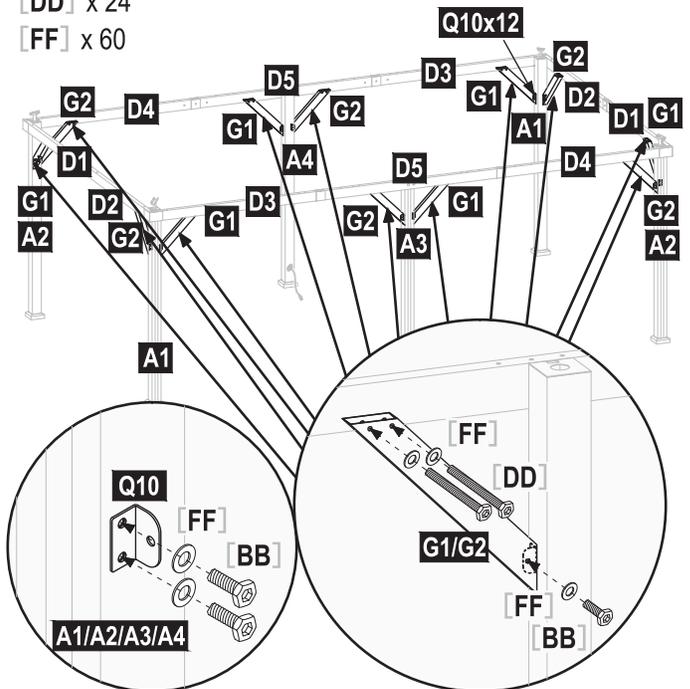
Repeat with the other five (5) support bracket [G1] with cross beam assembly [D1] [D2] and [D3] [D4] [D5].

Use one (1) [BB] bolt and one (1) [FF] flat washer to attach one (1) support bracket 2 [G2] to post [A1]. Use two (2) [DD] bolts and two (2) [FF] flat washers to attach one (1) support bracket 2 [G2] to cross beam assembly [D1] [D2].

Repeat with the other five (5) support bracket [G2] with post [A1], [A2], [A3] and [A4].


Repeat with the other five (5) support bracket [G2] with cross beam assembly [D1] [D2] and [D3] [D4] [D5].

- [BB] x 36
- [DD] x 24
- [FF] x 60




STEP 08 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) mosquito net rod 1 [H1] to cross beam [D1] [D2]. Repeat with the other three (3) mosquito net rod [H1]. Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) mosquito net rod 2 [H2] to cross beam [D3] [D4] [D5]. Repeat with the other seven (7) mosquito net rod [H2].

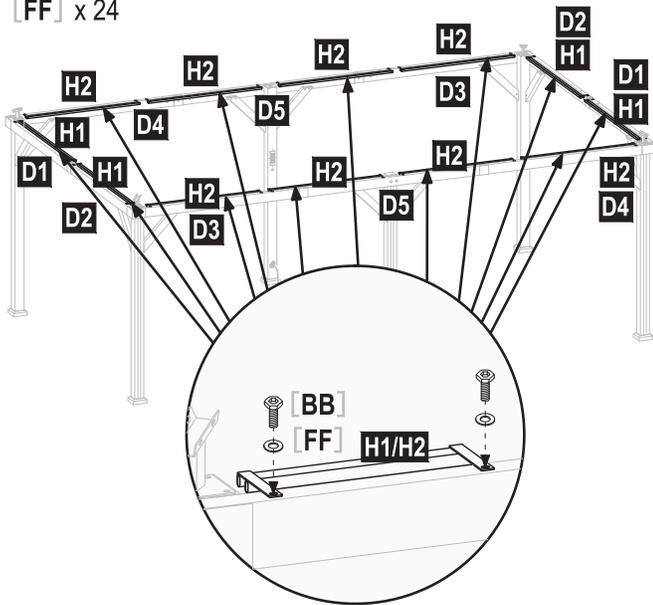- [BB] x 24
- [FF] x 24




STEP 09 Slide roof rib [E2] and [E3] into roof rib 1 [E1]. Use four (4) [AA] bolts and four (4) [FF] flat washers to attach roof rib assembly [E1] [E2]. Use one (1) [BB] bolt and one (1) [FF] flat washer to attach roof rib [E1]. Repeat with the other three (3) roof rib [E1], [E2] and [E3]. Use one (1) [BB] bolt and one (1) [FF] flat washer to attach roof rib [E1]. Use one (1) [BB] bolt and one (1) [FF] flat washer to attach one (1) connector 8 [Q8] to roof rib assembly [E1] [E2]. Repeat with the other seven (7) connector [Q8].

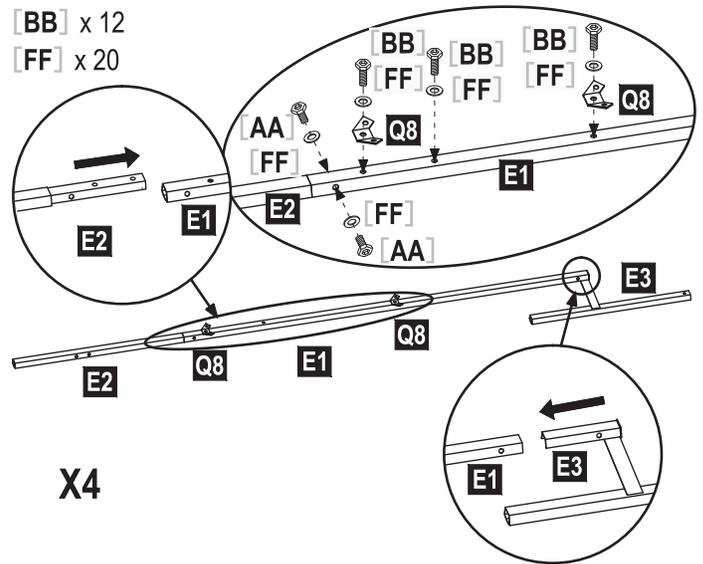- [AA] x 8
- [BB] x 12
- [FF] x 20




STEP 10 Slide connector 14 [Q14] into connector 13 [Q13]. Use two (2) [BB] bolts and two (2) [FF] flat washers to attach connector [Q13] to connector [Q14].

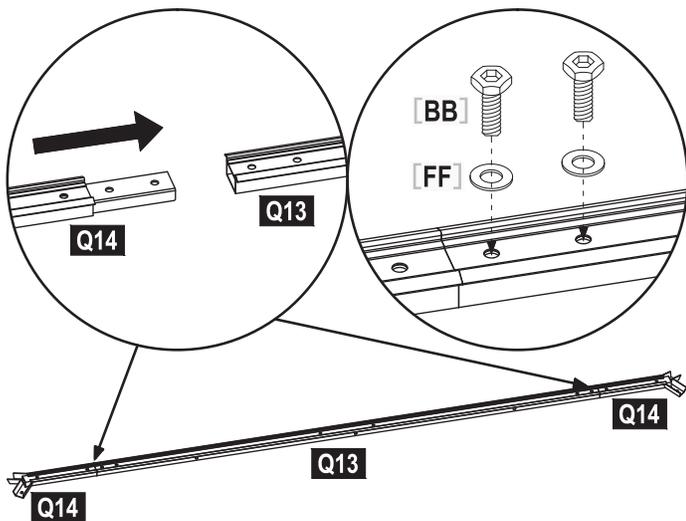- [BB] x 4
- [FF] x 4




STEP 11 Use four (4) [BB] bolts and four (4) [FF] flat washers to attach one (1) roof rib assembly [E1] [E2] [E3] to connector [Q1]. Repeat with the other three (3) roof rib assembly [E1] [E2] [E3].

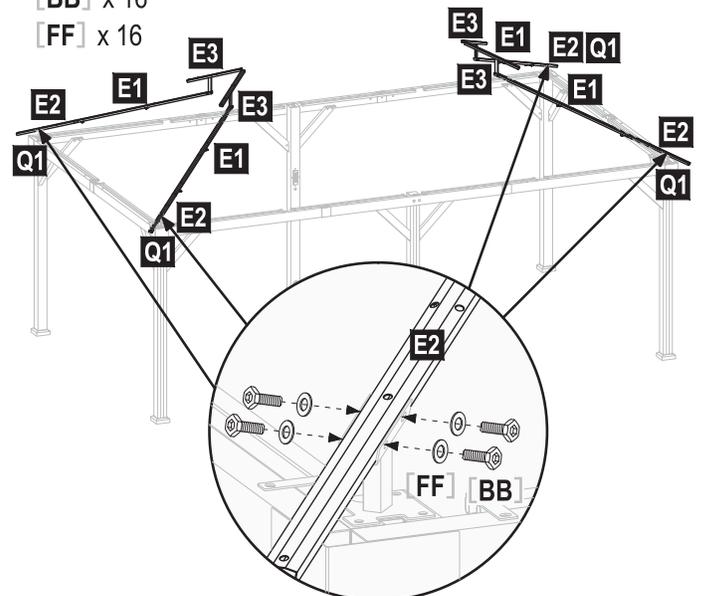- [BB] x 16
- [FF] x 16




STEP 12 Use four (4) [BB] bolts and four (4) [FF] flat washers to attach connector assembly Q13 Q14 to roof ribs E3.

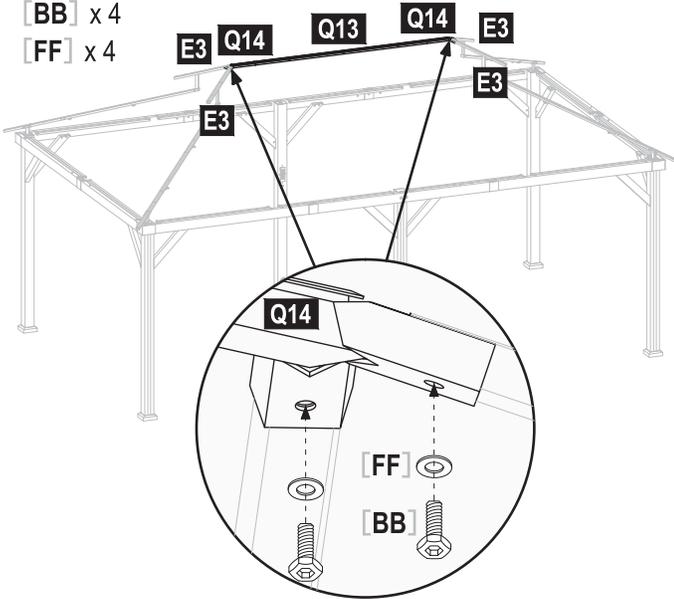- [BB] x 4
- [FF] x 4




STEP 13 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 3 Q3 to middle cross beam 2 F2. Repeat with the other five (5) connector Q3 with middle cross beam F2.

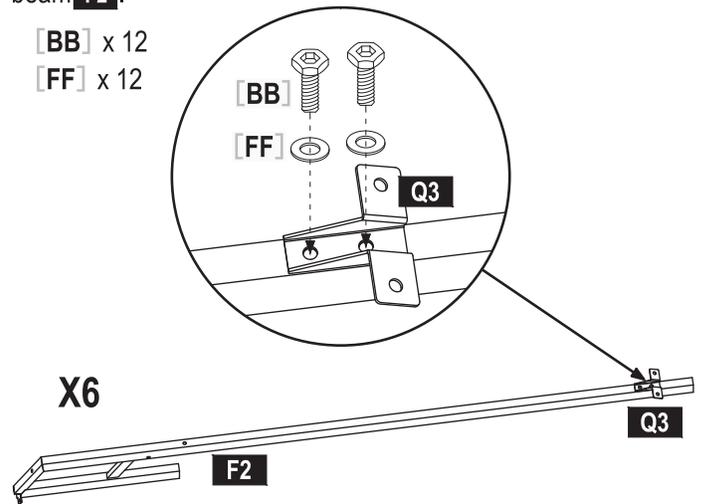- [BB] x 12
- [FF] x 12



STEP 14 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 2 Q2 to middle cross beam 1 F1. Repeat with the other five (5) connector Q2 with middle cross beam F1.

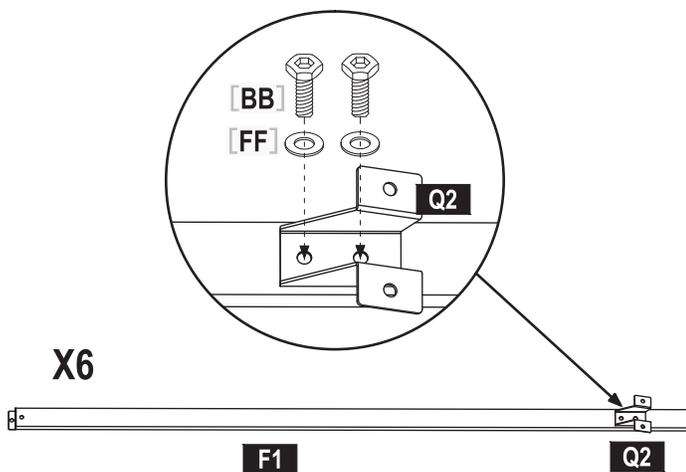
- [BB] x 12
- [FF] x 12



STEP 15 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) middle cross beam F2 to connector Q13. Use one (1) [DD] bolt, two (2) [FF] flat washers and one (1) [PP] screw nut to attach middle cross beam F2 with each other.

Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector Q3 to cross beam assembly D3 D4 D5. Repeat with the other five (5) middle cross beam assembly F2 Q3.

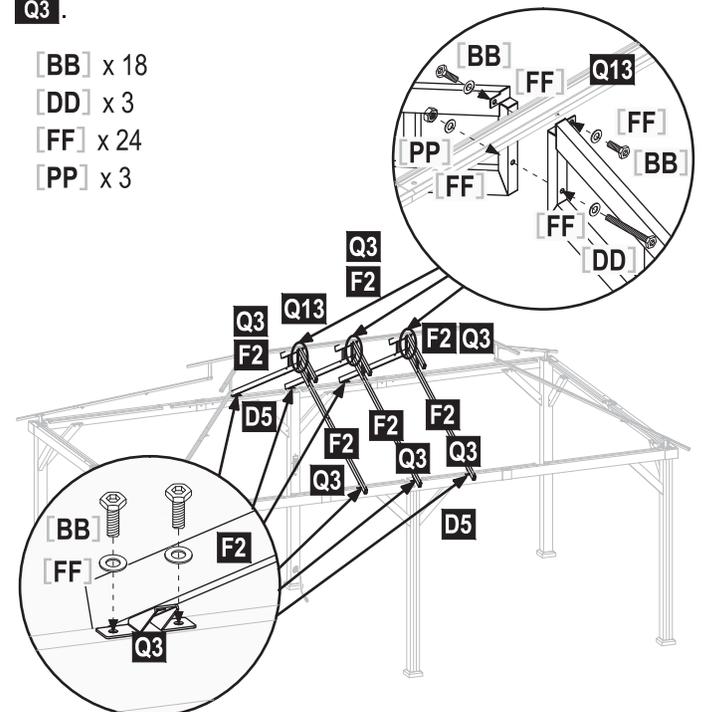- [BB] x 18
- [DD] x 3
- [FF] x 24
- [PP] x 3




STEP 16 Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach one (1) middle cross beam support 1 **[P1]** to middle cross beams **[F2]**.

Attach hook **[T]** to middle cross beam support **[P1]**.

Repeat with the other two (2) middle cross beam support **[P1]** and hook **[T]**.

[BB] x 6

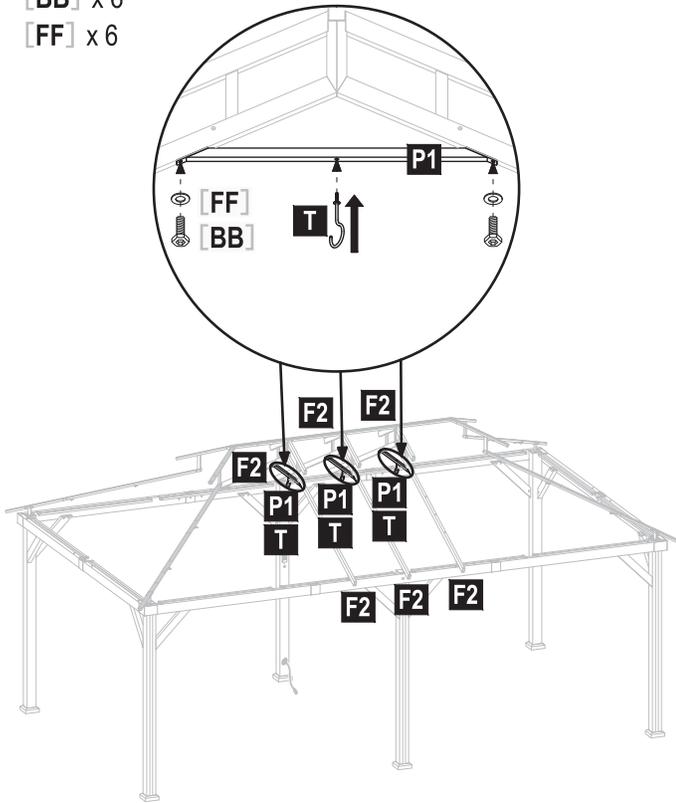[FF] x 6



STEP 17 Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach one (1) roof upper border 1 **[M1]** to roof rib **[E1]**. Repeat with the other roof upper border **[M1]**.

Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach one (1) roof upper border 2 **[M2]** to roof rib **[E1]** and middle cross beam **[F2]**.

Repeat with the other roof upper border **[M2]**.

Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach one (1) roof upper border 3 **[M3]** to roof rib **[E1]** and middle cross beam **[F2]**.

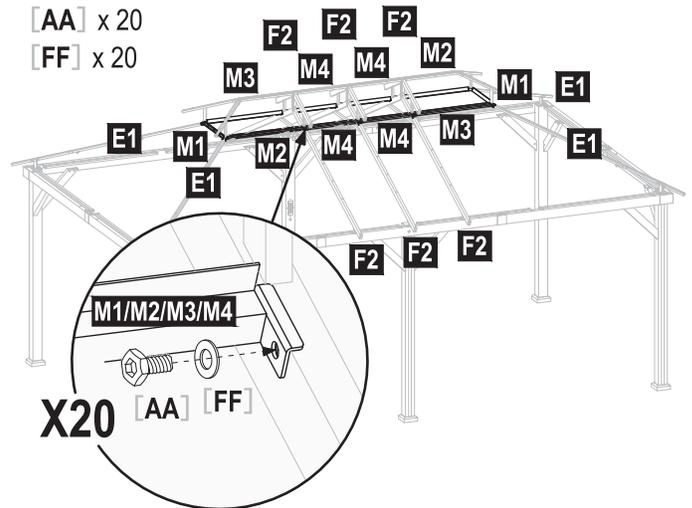
Repeat with the other roof upper border **[M3]**.

Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach one (1) roof upper border 4 **[M4]** to middle cross beams **[F2]**.

Repeat with the other three (3) roof upper border **[M4]**.

[AA] x 20

[FF] x 20




STEP 18 Use one (1) **[BB]** bolt and one (1) **[FF]** flat washer to attach one (1) middle cross beam **[F1]** to roof upper border **[M1]**. Repeat with the other five (5) middle cross beam **[F1]** to roof upper border **[M1]**, **[M2]** and **[M3]**.

Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach one (1) connector **[Q2]** to cross beam assembly **[D3]**, **[D4]**, **[D5]**.

Repeat with the other five (5) connector **[Q2]** to cross beam assembly **[D3]**, **[D4]**, **[D5]** and **[D1]**, **[D2]**.


[BB] x 18

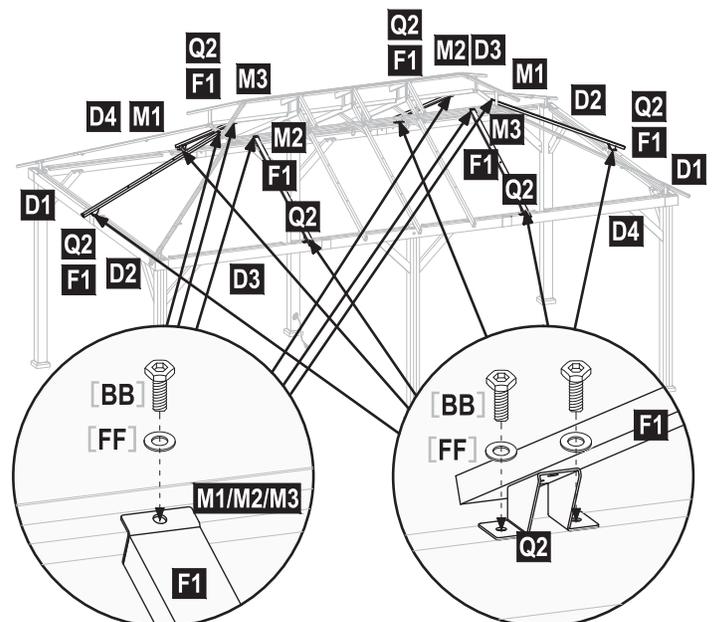[FF] x 18




STEP 19 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) middle cross beam support 2 [P2] to middle cross beam [F1].

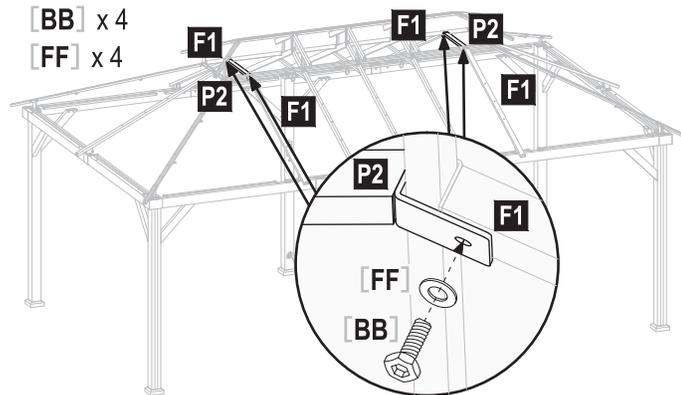Repeat with the other middle cross beam support [P2].




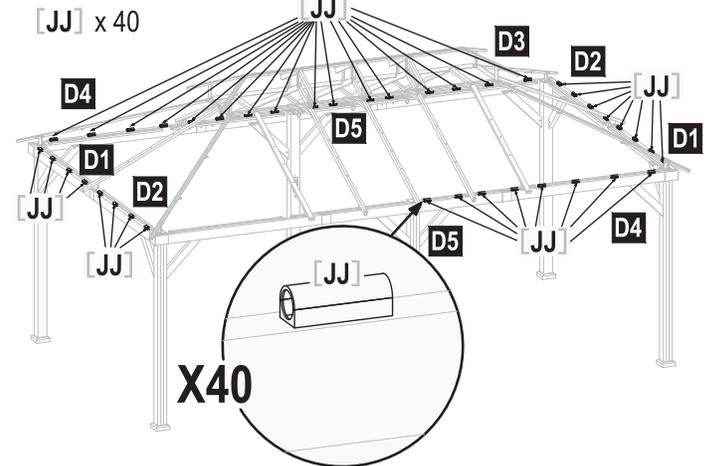STEP 20 Stick forty (40) [JJ] the wire mounting to the cross beams as needed.



STEP 21 Install the wires according to the route map as shown.

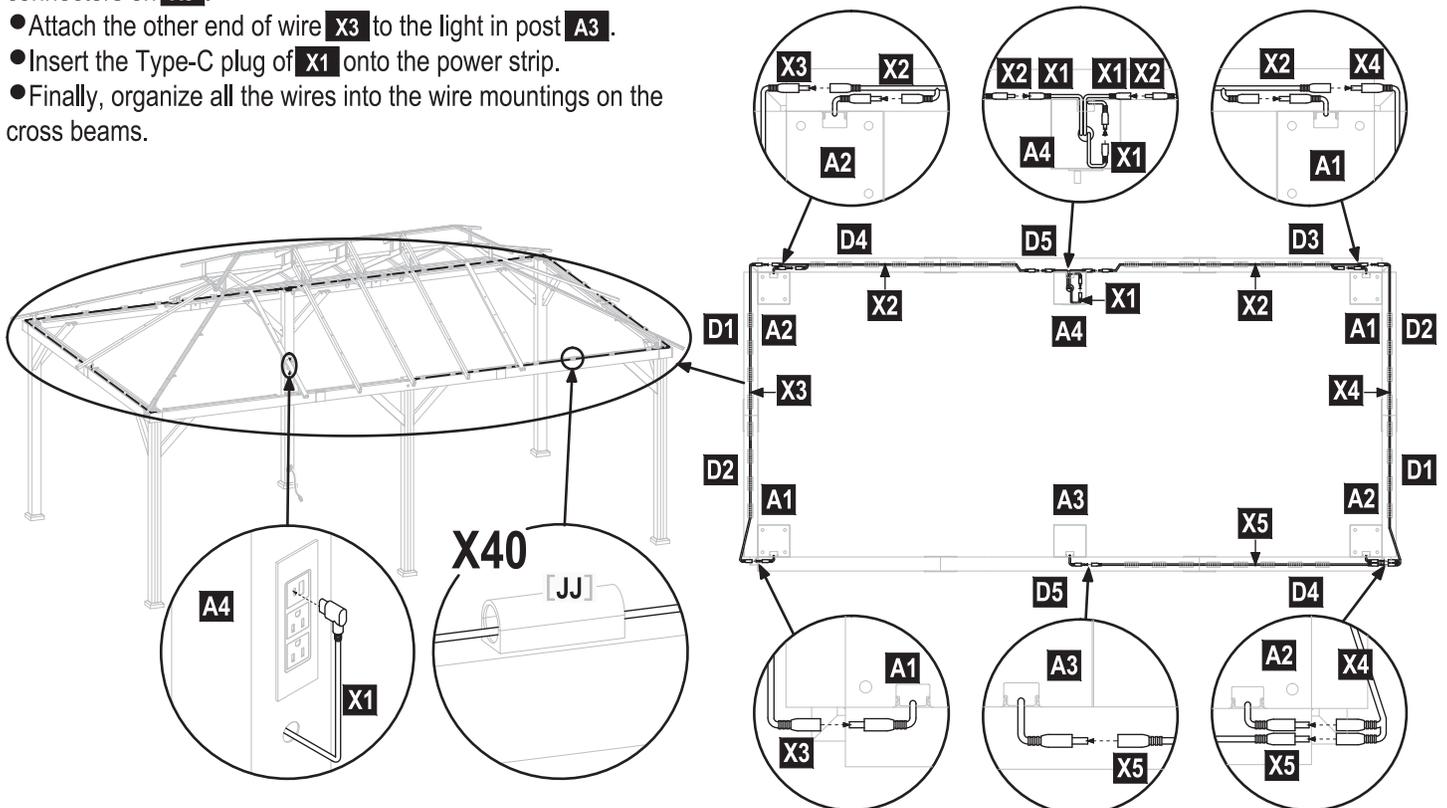- [X1] has been pre-installed in the post [A4]. Attach one of the wire connectors of [X1] to the light in post [A4]. Attach the second connector to the separate connector of [X2] on the left third, and the third connector to the separate connector of [X2] on the right side.
- Attach one of the connectors at the other end of left side wire [X2] to the light in post [A2], and attach the other connector to one of the connectors on [X3].
- Attach the other end of wire [X3] to the light in post [A1].
- Attach one of the connectors at the other end of right-side wire [X2] to the light in pos [A1], and attach the other connector to one of the separate connectors of wire [X4].
- Attach one of connectors at the other end of wire [X4] to the light in post [A2], and attach the other connector to the one of the connectors on [X5].
- Attach the other end of wire [X3] to the light in post [A3].
- Insert the Type-C plug of [X1] onto the power strip.
- Finally, organize all the wires into the wire mountings on the cross beams.



STEP 22 Attach three (3) connector 7 **Q7** to two (2) roof lower border 3 **K3** as shown.

Use one (1) **BB** bolt and one (1) **FF** flat washer to attach each connector **Q7** to middle cross beam **F2**.

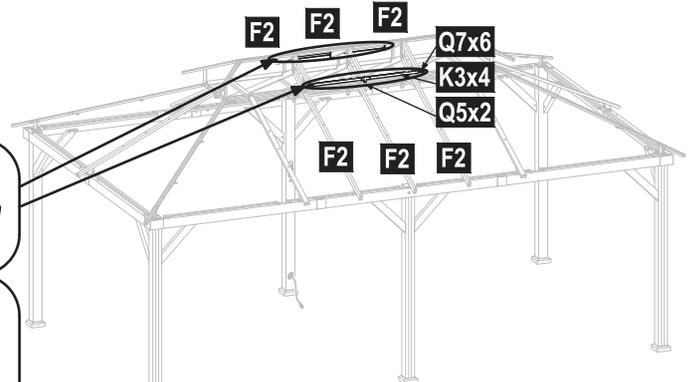
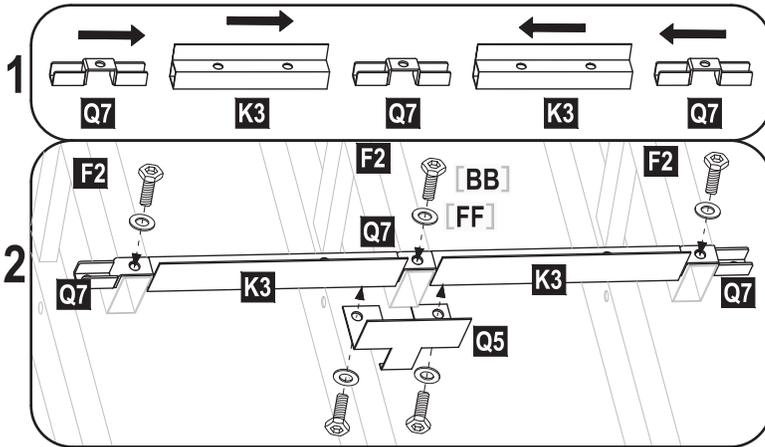
Repeat with the other connector **Q7** and roof lower border **K3**.

Use two (2) **BB** bolts and two (2) **FF** flat washers to attach one (1) connector 5 **Q5** to roof lower border 3 **K3**.

Repeat with the other connector **Q5**.

BB x 10

FF x 10




STEP 23 Use one (1) **BB** bolt and one (1) **FF** flat washer to attach one (1) roof top border **L1** to **L2**. Use one (1) **BB** bolt and one (1) **FF** flat washer to attach one (1) roof top border **L1** to **L3**.

Repeat with the roof top border **L1**, **L2** and **L3**.

BB x 4

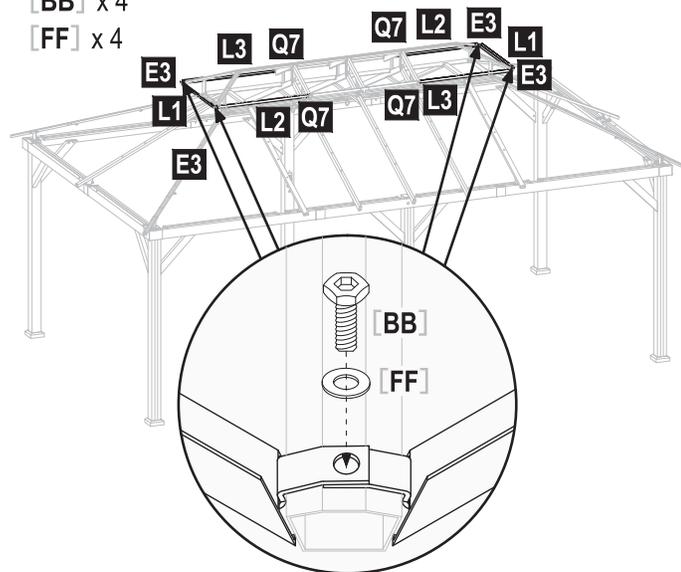FF x 4




STEP 24 Use two (2) **BB** bolts and two (2) **FF** flat washers to attach one (1) connector 5 **Q5** to roof support **L2** and roof lower border **K3**.

Use two (2) **BB** bolts and two (2) **FF** flat washers to attach one (1) connector 5 **Q5** to roof support **L3** and roof lower border **K3**.

Repeat with the other two (2) connector **Q5**.

BB x 8

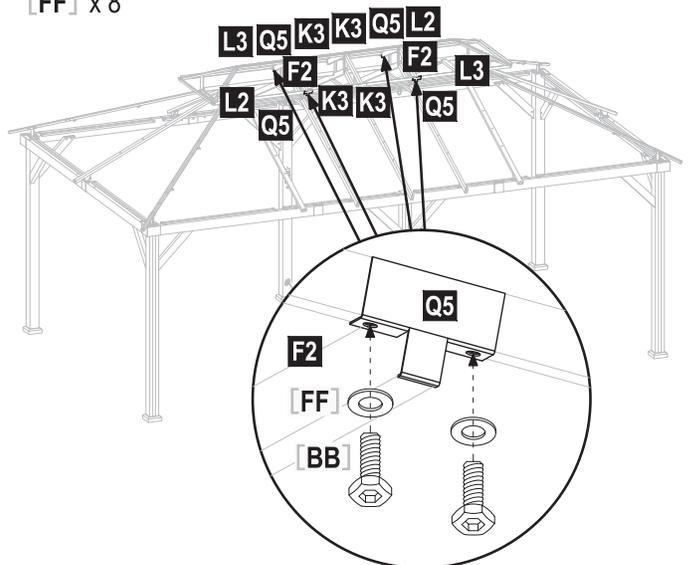FF x 8



STEP 25 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) roof plate 1 [S1] to roof rib [E3] and roof top border [L2].

repeat with the other roof plate [S1].

Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) roof plate 1 [S1] to roof rib [E3] and roof top border [L1].

repeat with the other roof plate [S1].

Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) roof plate 2 [S2] to roof rib [E3] and roof top border [L1].

repeat with the other roof plate [S2].

Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) roof plate 2 [S2] to roof rib [E3] and roof top border [L2].

repeat with the other roof plate [S2].

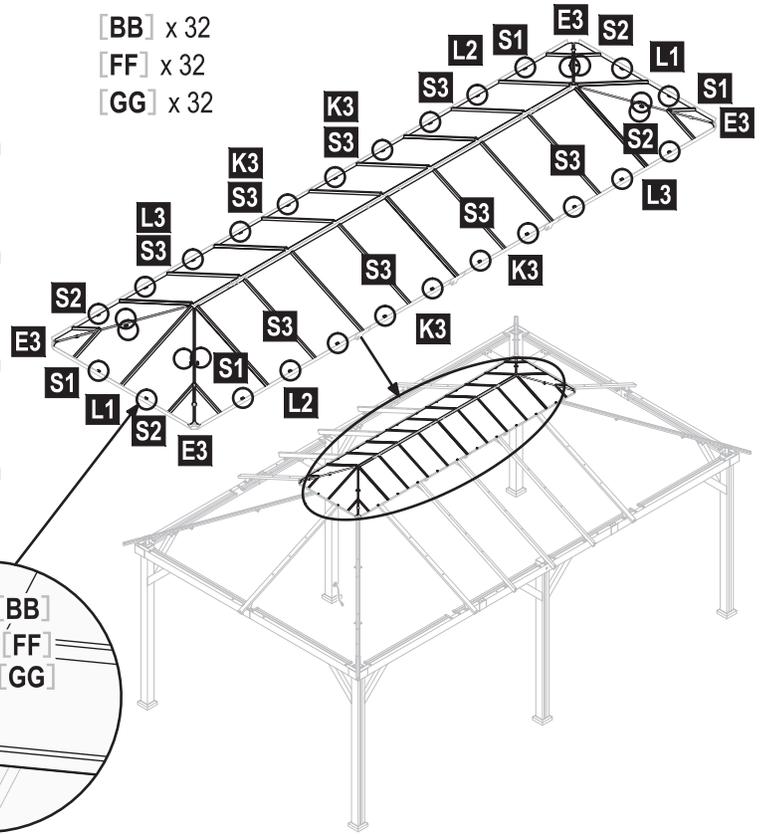
Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) roof plate 3 [S3] to roof lower border [K3].

repeat with the other seven (7) roof plate [S3].

[BB] x 32

[FF] x 32

[GG] x 32



X32

STEP 26 Use one (1) [CC] bolt and one (1) [FF] flat washer to attach one (1) roof cover 4 [N4] to roof rib 3 [E3].

Repeat with the other three (3) roof cover [N4].

STEP 27 Use one (1) [CC] bolt and one (1) [FF] flat washer to attach one (1) roof cover 3 [N3] to connector [Q14].

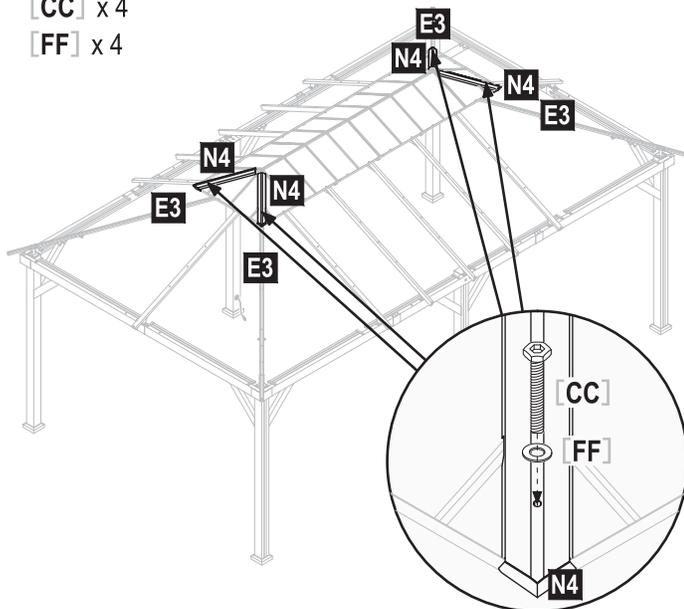
Repeat with the other roof cover [N3].

Use two (2) [CC] bolt and two (2) [FF] flat washer to attach one (1) roof cover 1 [N1] to connector [Q13].

Repeat with roof cover [N2].


[CC] x 4

[FF] x 4



[CC] x 6

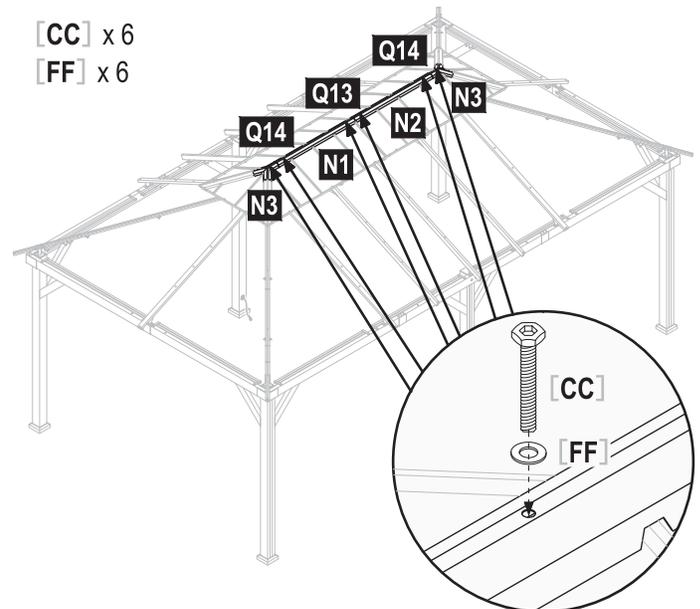
[FF] x 6



STEP 28 Attach two (2) connector 6 **Q6**, two (2) roof support 2 **J2** to three (3) connector 7 **Q7** and two (2) roof support 1 **J1** as shown.


Use eight (8) **AA** bolt and eight (8) **FF** flat washer to attach the whole set.

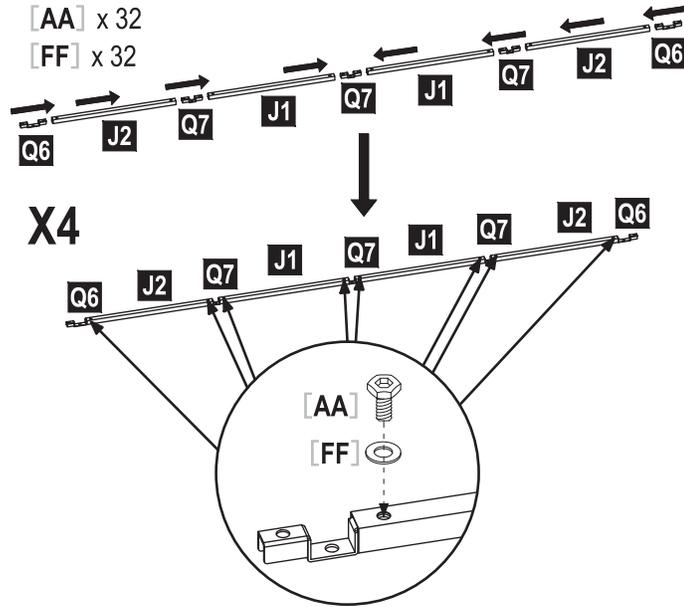Repeat with the other six (6) connector **Q6**, six (6) roof support **J2**, nine (9) connector **Q7** and six (6) roof support **J1**.



STEP 29 Use four (4) **BB** bolts and four (4) **FF** flat washers to attach one (1) assembly **Q6 J2 Q7 J1** to middle cross beam **F1** and **F2**.

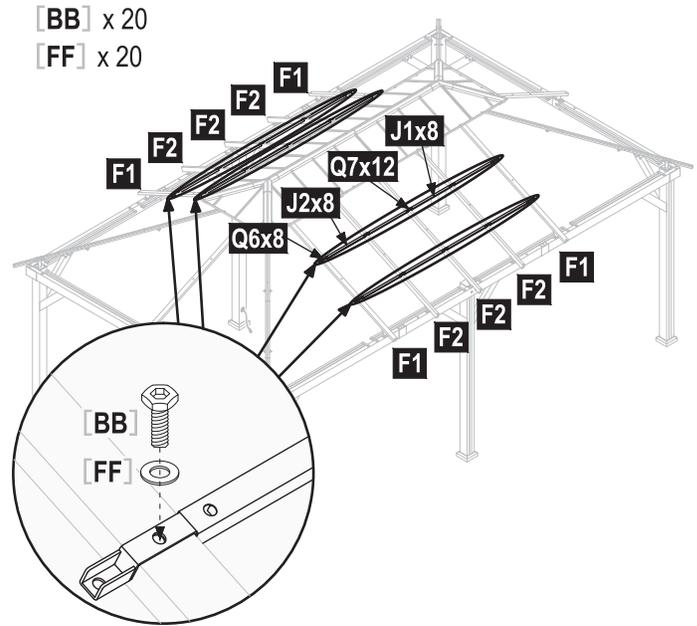Repeat with the other three assembly **Q6 J2 Q7 J1**.




STEP 30 Slide roof support **J3** and **J4** onto connector **Q6** and **Q7**. Use two (2) **AA** bolts and two (2) **FF** flat washers to attach one (1) roof support **J3** to connector **Q6** and **Q7**.


Repeat with the other three (3) roof support **J3**.

Use two (2) **AA** bolts and two (2) **FF** flat washers to attach one (1) roof support **J4** to connector **Q6** and **Q7**.

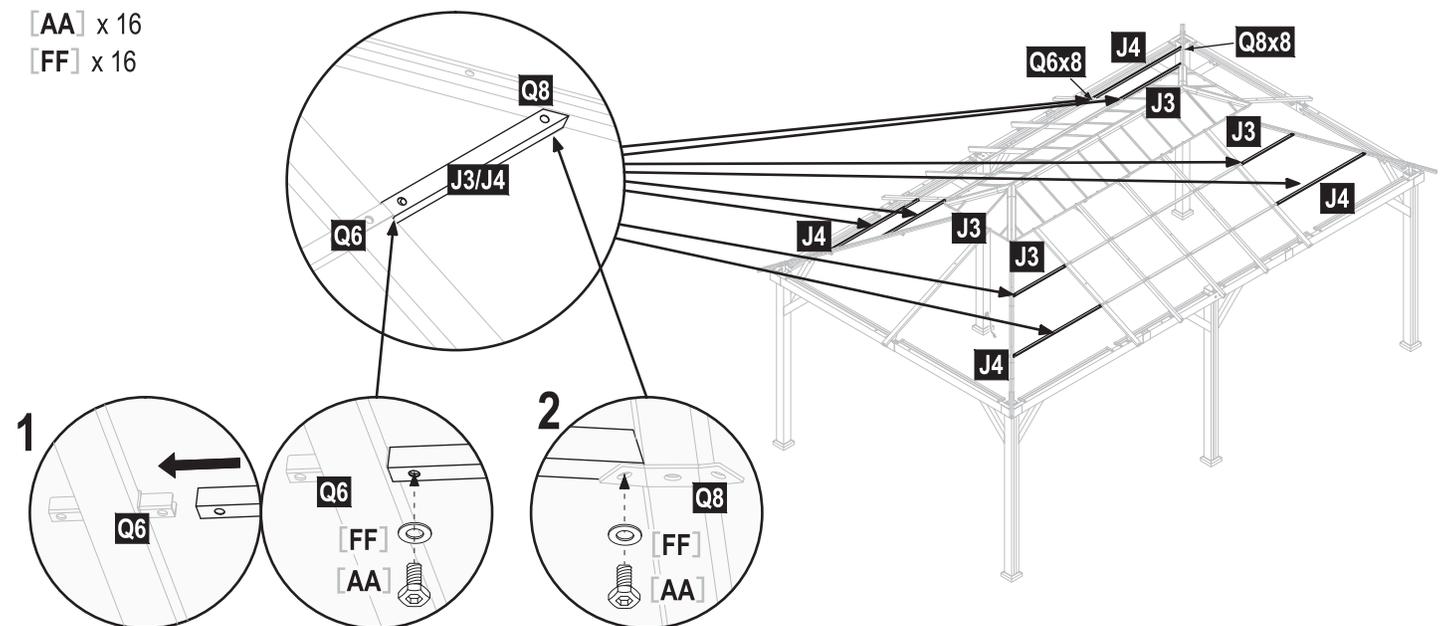Repeat with the other three (3) roof support **J4**.




STEP 31 Slide two (2) roof support **J3** onto connector **Q6**. Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach roof support **J3** to connector **Q6**. Use one (1) **[BB]** bolt and one (1) **[FF]** flat washer to attach assembly **J3 Q6** to middle cross beam **F1**. Use one (1) **[AA]** bolt and one (1) **[FF]** flat washer to attach assembly **J3 Q6** to connector **Q8**.
 Slide two (2) roof support **J4** onto connector **Q6**. Use two (2) **[AA]** bolts and two (2) **[FF]** flat washers to attach roof support **J4** to connector **Q6**. Use one (1) **[BB]** bolt and one (1) **[FF]** flat washer to attach assembly **J4 Q6** to middle cross beam **F1**. Use one (1) **[AA]** bolt and one (1) **[FF]** flat washer to attach assembly **J3 Q6** to connector **Q8**.

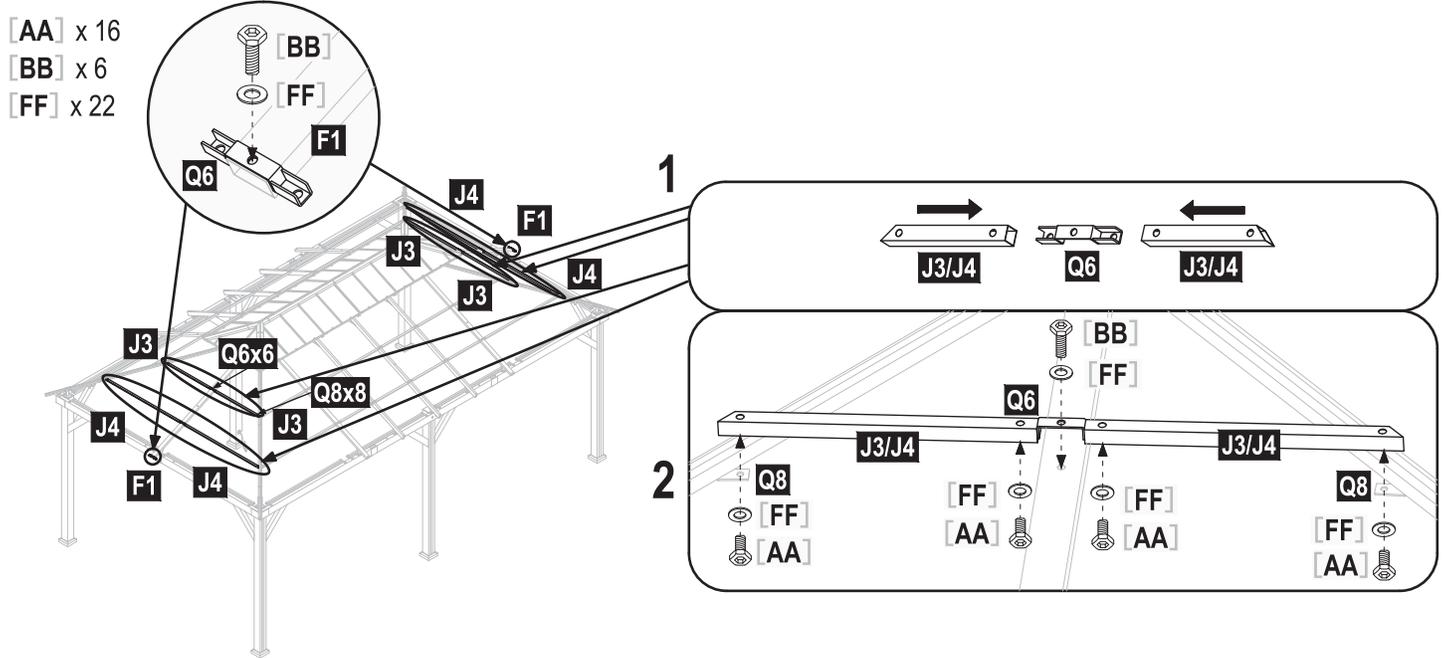

STEP 32 Attach two (2) connector 6 **Q6**, one (1) roof lower border 5 **K5** and roof lower border 4 **K4** to three (3) connector 7 **Q7** and two (2) roof lower border 3 **K3** as shown.


Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach one (1) assembly to middle cross beam **F1** and **F2**. Repeat with the other assembly **Q6 K5 K4 Q7 K3**.
 Use two (2) **[BB]** bolts and two (2) **[FF]** flat washers to attach one (1) connector 5 **Q5** to the assembly. Repeat with the other five (5) connector **Q5**.

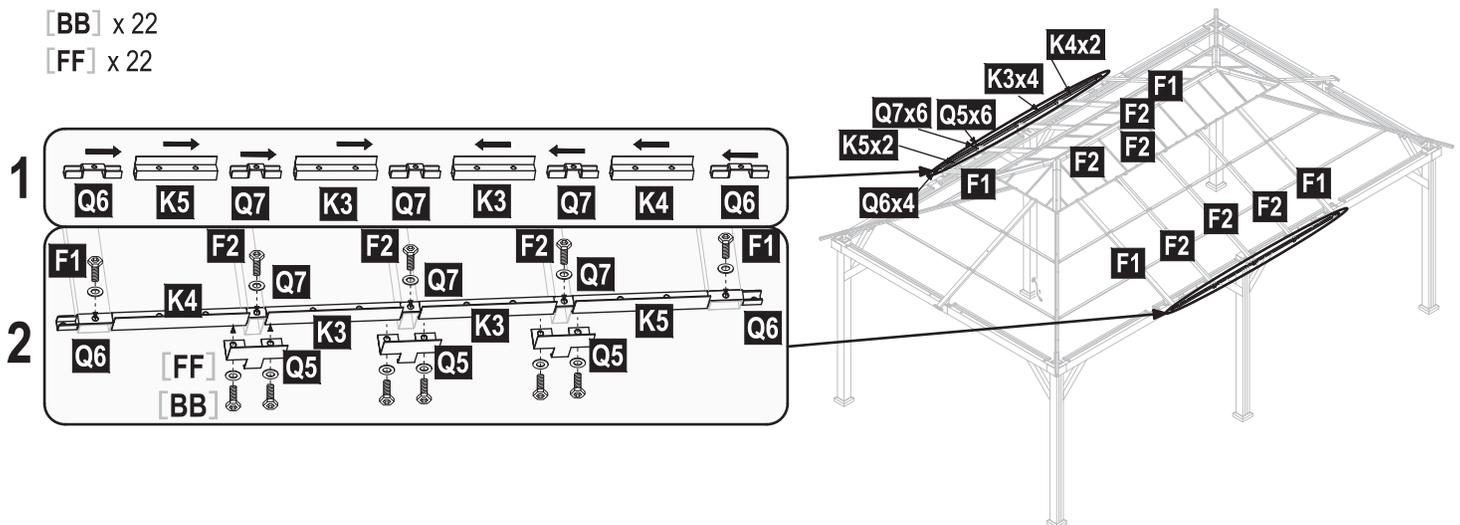[BB] x 22
[FF] x 22



STEP 33 Use one (1) [BB] bolt and one (1) [FF] flat washer to attach roof lower border [K1] and [K2] to roof rib [E2]. Repeat with the other three (3) roof lower border [K1] and [K2].

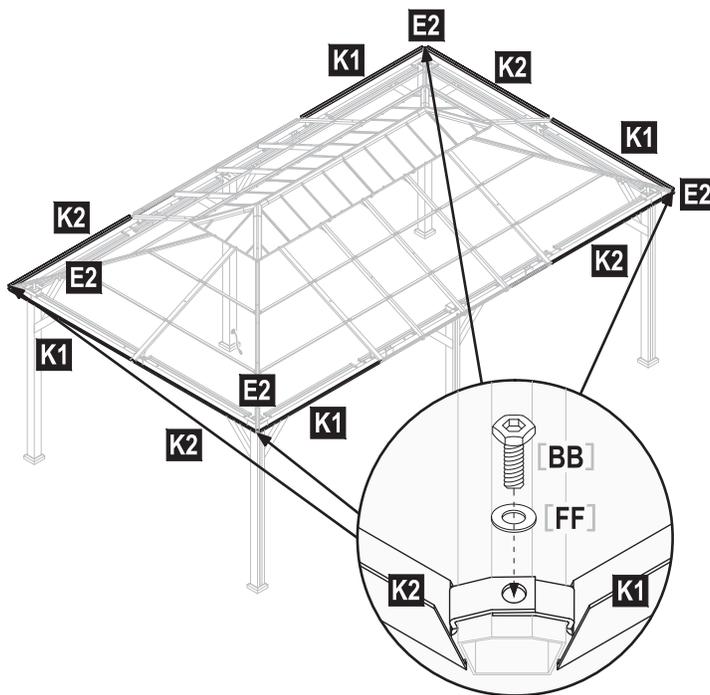
- [BB] x 4
- [FF] x 4



STEP 34 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 4 [Q4] to roof lower border [K1] and [K4].


Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 4 [Q4] to roof lower border [K2] and [K5].
 Use two (2) [BB] bolts and two (2) [FF] flat washers to attach one (1) connector 4 [Q4] to roof lower border [K1] and [K2].
 Repeat with the other three (3) connector [Q4].

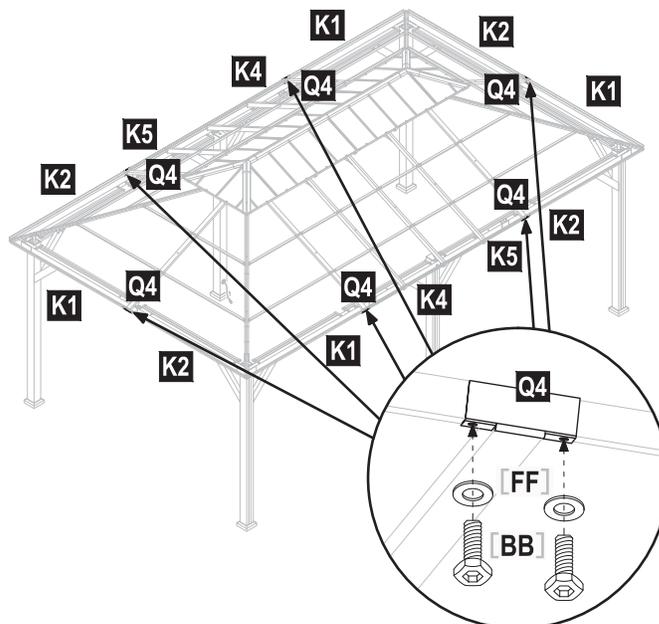- [BB] x 12
- [FF] x 12



STEP 35 Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 1 [R1] to roof lower border [K4]. Use two (2) [HH] plastic clip to attach one (1) roof plate 1 [R1] to roof upper border 4 [M4]. Repeat with the other seven (7) roof plate [R1] to roof lower border [K3], [K4] and [K5] and roof upper border [M2], [M3] and [M4]. Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 2 [R2] to roof lower border [K1]. Use two (2) [HH] plastic clip to attach one (1) roof plate 2 [R2] to roof upper border 2 [M2]. Repeat with the other roof plate [R2]. Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 3 [R3] to roof lower border [K2]. Use two (2) [HH] plastic clip to attach one (1) roof plate 3 [R3] to roof upper border 3 [M3]. Repeat with the other roof plate [R3]. Use three (3) [BB] bolts, three (3) [FF] flat washers and three (3) [GG] sealant washers to attach one (1) roof plate 4 [R4] to roof lower border [K1] and roof rib [E2]. Repeat with the other roof plate [R4]. Use three (3) [BB] bolts, three (3) [FF] flat washers and three (3) [GG] sealant washers to attach one (1) roof plate 5 [R5] to roof lower border [K2] and roof rib [E1]. Repeat with the other roof plate [R5]. Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 6 [R6] to roof lower border [K1] and roof rib [E2]. Repeat with the other roof plate [R6]. Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 7 [R7] to roof lower border [K2] and roof rib [E2]. Repeat with the other roof plate [R7]. Use five (5) [SS] bolts, five (5) [TT] flat washers and five (5) [UU] sealant washers to attach four (4) roof plates [R1] to the frame. Repeat with the other four (4) roof plates [R1].

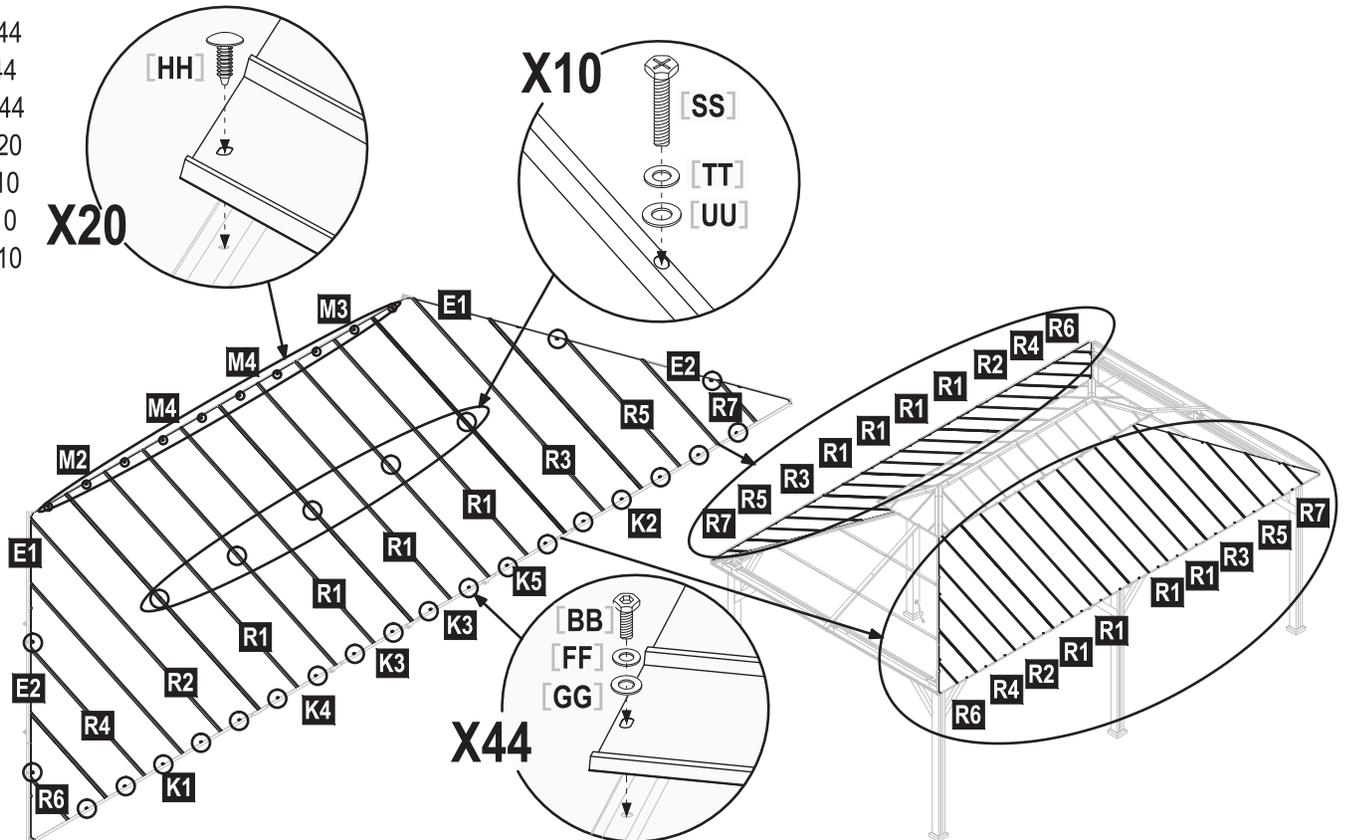- [BB] x 44
- [FF] x 44
- [GG] x 44
- [HH] x 20
- [SS] x 10
- [TT] x 10
- [UU] x 10



STEP 36 Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 6 [R6] to roof lower border [K1] and roof rib [E2].

Use three (3) [BB] bolts, three (3) [FF] flat washers and three (3) [GG] sealant washers to attach one (1) roof plate 4 [R4] to roof lower border [K1] and roof rib [E1].

Use two (2) [BB] bolts, two (2) [FF] flat washers, two (2) [GG] sealant washers and one (1) [HH] plastic clip to attach one (1) roof plate 2 [R2] to roof lower border [K1] and roof upper border [M1].

Use two (2) [BB] bolts, two (2) [FF] flat washers, two (2) [GG] sealant washers and one (1) [HH] plastic clip to attach one (1) roof plate 3 [R3] to roof lower border [K1] and roof upper border [M1].

Use three (3) [BB] bolts, three (3) [FF] flat washers and three (3) [GG] sealant washers to attach one (1) roof plate 5 [R5] to roof lower border [K2] and roof rib [E1].

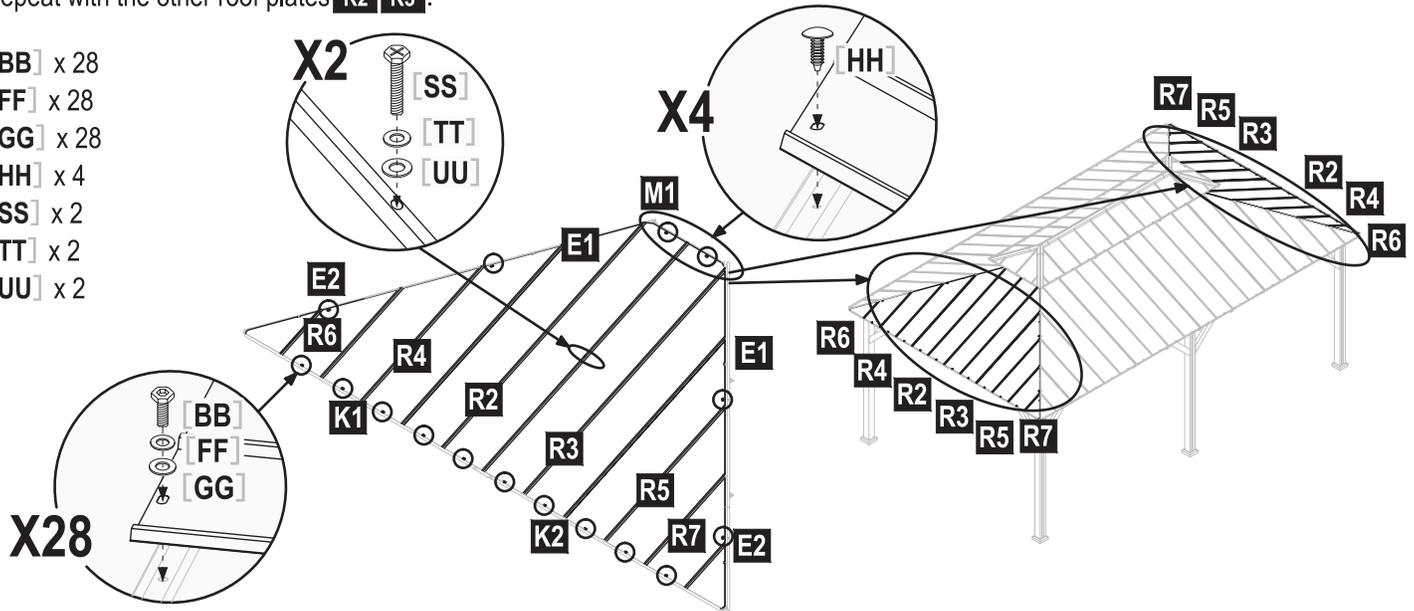
Use two (2) [BB] bolts, two (2) [FF] flat washers and two (2) [GG] sealant washers to attach one (1) roof plate 7 [R7] to roof lower border [K2] and roof rib [E2].

Repeat with the other roof plates [R2], [R3], [R4], [R5], [R6] and [R7].

Use one (1) [SS] bolts, one (1) [TT] flat washers and one (1) [UU] sealant washers to attach roof plates [R2] [R3] to the frame.


Repeat with the other roof plates [R2] [R3].

- [BB] x 28
- [FF] x 28
- [GG] x 28
- [HH] x 4
- [SS] x 2
- [TT] x 2
- [UU] x 2





STEP 37 Use three (3) [CC] bolts and three (3) [FF] flat washers to attach one (1) roof cover [N5] and [N6] to roof rib [E1] and [E2].

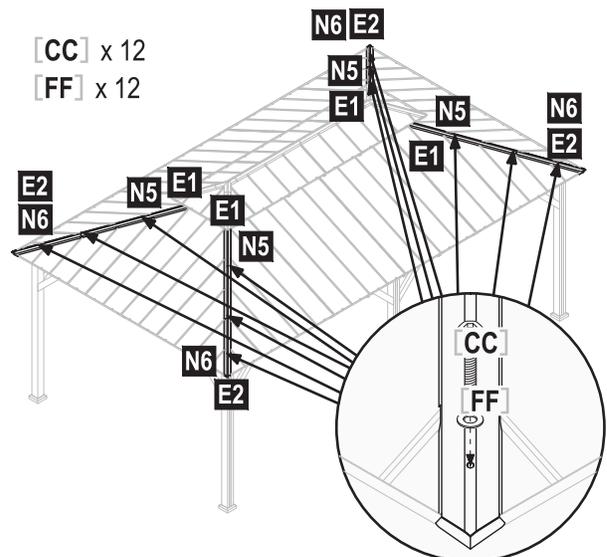Repeat with the other three (3) roof cover [N5] and [N6].





STEP 38 Use four (4) [EE] bolts to attach electrical power cover [U] to the post [A4].

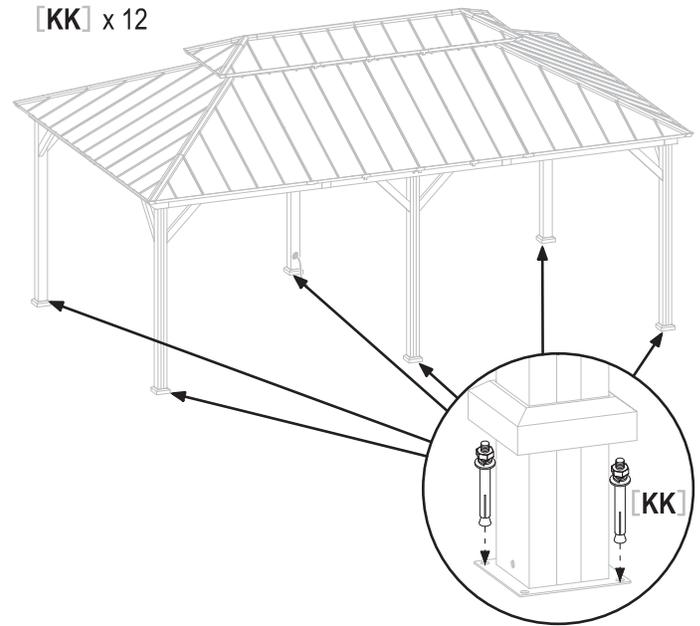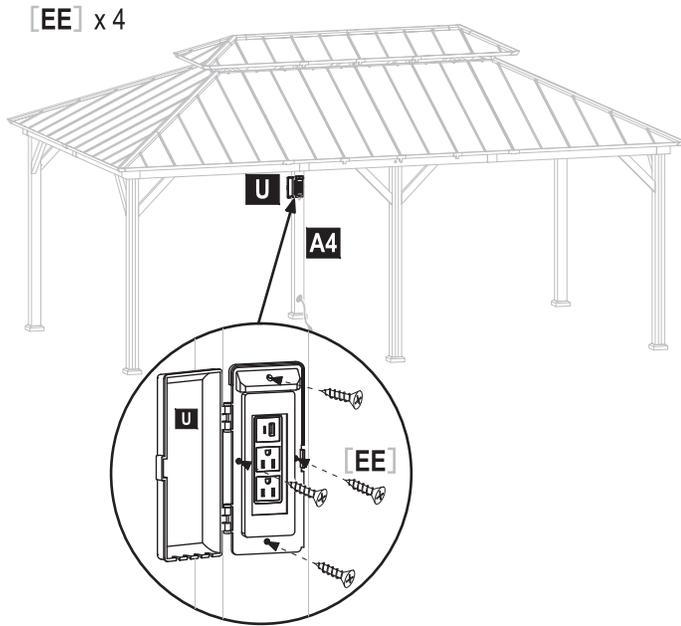STEP 39 Use two (2) [KK] expansion bolts to anchor each post foot base [C].



STEP 40 Use rings to attach mosquito netting [Y] to the gazebo.

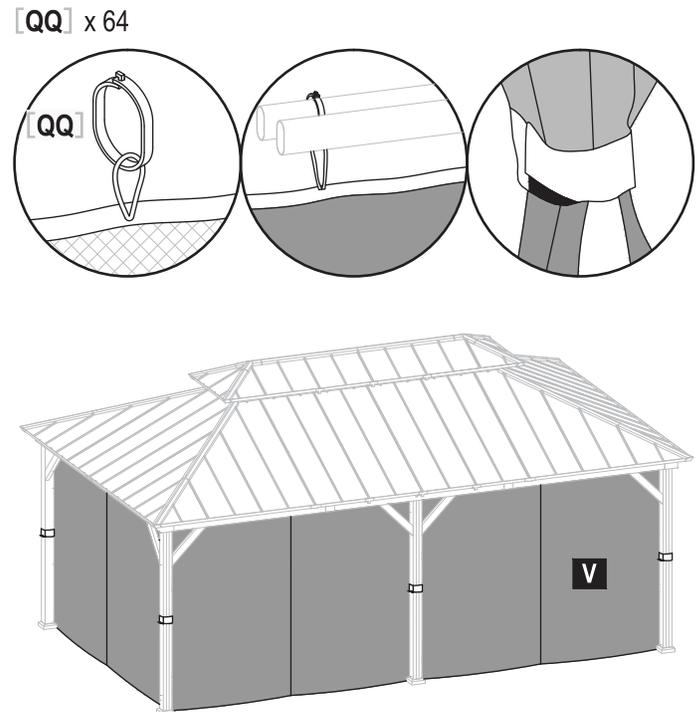
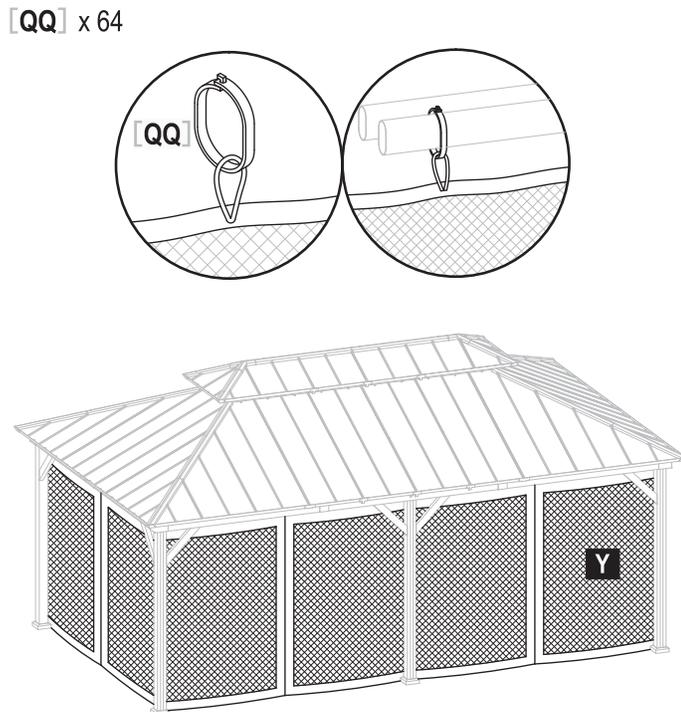
STEP 41 Use rings to attach the privacy curtain [V] to the gazebo.




How to replace wire **X2/X3/X4/X5** ?

1. Disconnect the wire connector, remove the faulty component.

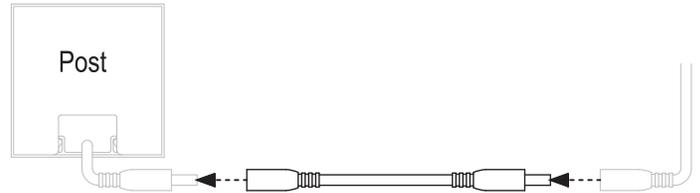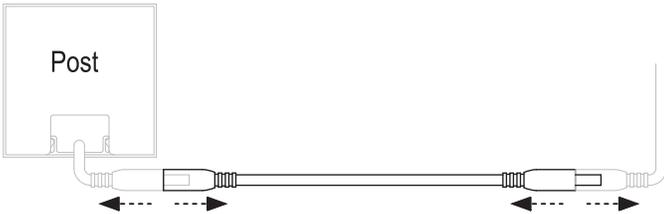2. Reconnect the new component (from spare wire pack **ZS**).



How to replace wire **X1** ?

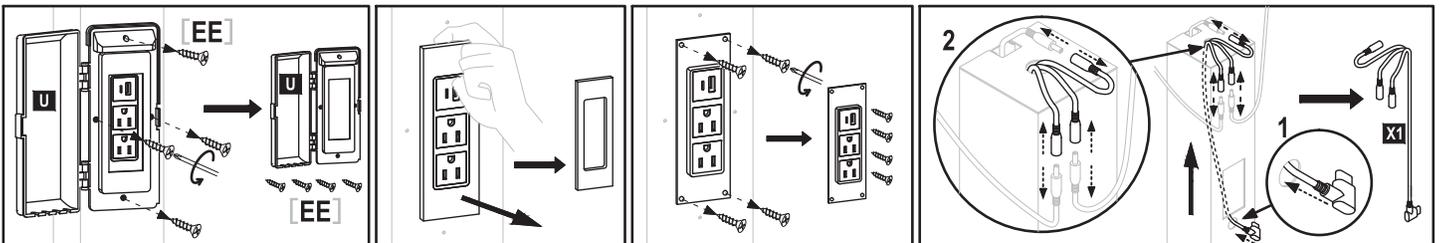


1. Unscrew four (4) **EE** bolts, and remove the electrical power cover **U**.

2. Lift out the power trip cover.

3. Unscrew the four bolts on the power strip, and remove the power strip.

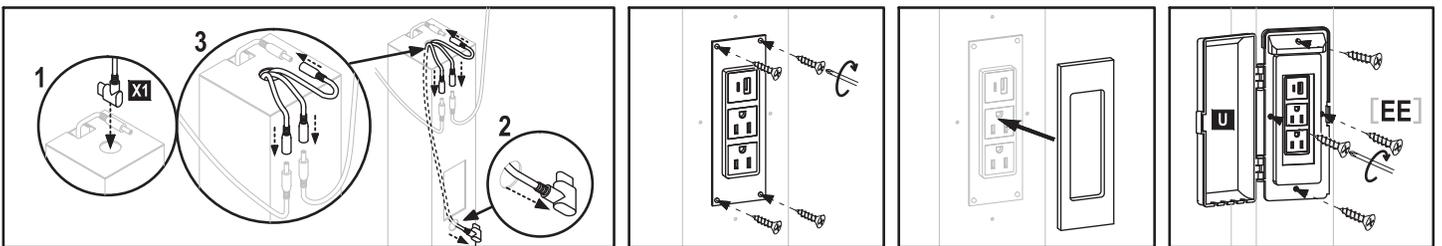4. Thread the type-C connector through the hole, then separate the three connectors, and finally pull the wire **X1** out from the top.




5. Thread a new wire **X1** (from spare wire pack **ZS**) through the top hole, pass the type-C connector out through the lower hole, and finally reconnect the three connectors.

6. Secure the power strip in place using four screws.


7. Attach the power strip cover.

8. Use four (4) **EE** bolts to reattach electrical power cover **U** to the post **A4**.

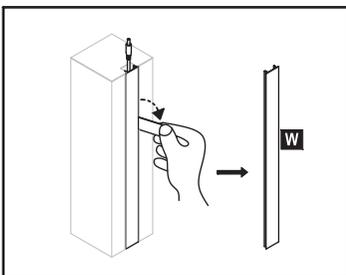
How to replace the LED light?



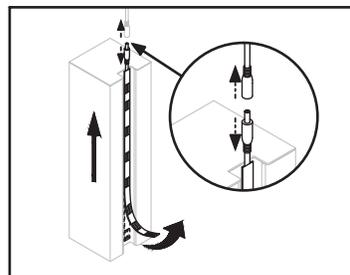
1. Lever opens the lights cover **W**, and remove it.



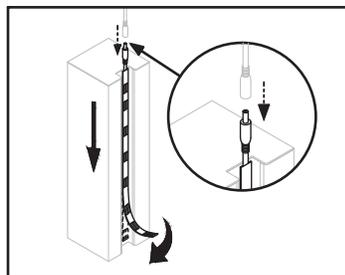2. Disconnect the wire connector, and then pull out the light.




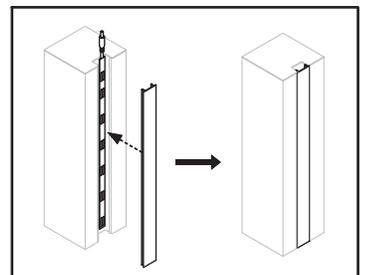
3. Insert the new light strip (from spare light pack **Z**) from the top, affix the light strip in place, and then reattach the connector.



4. Reassemble the lights cover **W**.

Outdoor Structure anchoring guide for anchoring gazebo to wood or concrete: If step 39, on page 18 in the assembly instructions is not properly completed, this will void the warranty.

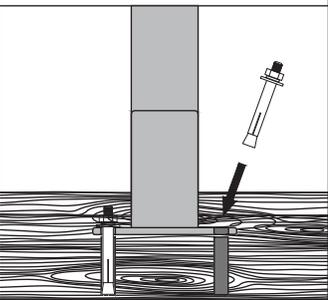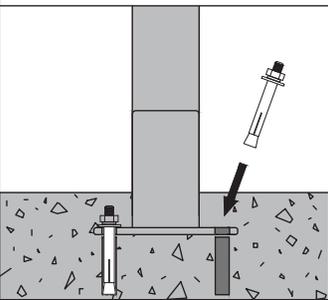⚠ WARNING! If your gazebo is not properly anchored, damage could occur. It is highly recommended for maximum safety that you mount and secure to wood or concrete footers. This is far better and safer than using ground stakes. The following are some examples of how to mount the structure to wood or concrete surfaces. Refer to local building codes or consider consulting a licensed contractor for assistance in the anchoring of this product.

WOOD	CONCRETE
	
<p>Anchors should be drilled into joists or reinforced blocking (not only deck boards).</p>	<p>Pre-drill holes for appropriately sized concrete anchors.</p>
 <p>Recommended Hardware: Expansion Bolt</p>	 <p>Recommended Hardware: Expansion Bolt</p>

If digging for foundation, please double check for possibility of any underground utilities such as gas, telephone, cable or sprinkler lines. Refer to your local building and city codes, ordinances, neighborhood covenants, or height restrictions regarding this type of structure for guidance on acceptable installation requirements.

⚠ CAUTION
DO NOT climb or walk on roof for any reason.

- Our components are intended for privacy, decorative and ornamental use only.
- Product is NOT INTENDED for the following:
 - A safety barrier to prevent unsupervised access to pools, hot tubs, spas or ponds.
 - As load bearing support for a building, structure, heavy objects or swings.
 - Used in structures that trap wind, rain or snow that would create extra load on the product.
 - Accumulated snow must be removed from roof.
 - DO NOT climb or walk on roof for any reason.

LIMITED WARRANTY

We warrants this product against defects in materials and workmanship for a period of one (1) year from the original date of purchase. To the extent any such defects occur, our products will send the appropriate replacement part(s) at no charge.

This warranty does not cover:

- Inspection costs or labor for replacement of any defective parts);
- Incidental or consequential damages;
- Cosmetic defects which DO NOT affect performance;
- Normal wear and tear;
- Damage due to vandalism; acts of nature, including but not limited to wind, storms, hail, floods;
- Improper assembly, installation, or use;
- Discoloration or fading of the finish as a result of exposure to chemicals, spills, pool or salt water
- Corrosion/ rust.

Your product has been designed for safety and quality. Any modifications made to the original product could compromise its structural integrity or function, and could lead to product failure or personal injury. As such, modifying this product voids any and all warranties.

This product is warranted for RESIDENTIAL USE ONLY, and is not for commercial, contract or other non-residential purposes. Products disclaims all other representations and warranties of any kind, express or implied.

The warranty applies to the original purchaser and is non-transferable. It does not apply to purchases of display models, or when the product is sold on clearance or "as is".

We makes no warranty whatsoever in respect to accessories or parts not supplied with it. This warranty shall apply only within the boundaries of the United States of America and Canada. This warranty gives the original purchaser specific rights, and the original purchaser may also have other rights, which vary from state to state.

